

A0620110 Meteor-100W

Underwater Pool Light

Operating Instructions



CONTENTS

Preface..... 2

Precautions 2

Features 3

Components and Cable connection 3

Installation 4+5+7+8

Technical Specifications..... 6

Declaration of conformaty.....9

PREFACE

The METEOR 100W, compact ultra-thin underwater pool light with built-in driver is designed to use the latest LED lighting technology.

The surface-mount designed casing enable very simple installation on the flat surface without any surface preparation during construction and the max. diameter of the hole through the wall is 8 mm.

The METEOR 100W is available in stainless steel casings with 6 warm white highpower LEDs.

The most advanced electronic design with built-in microprocessor enables network connection and simple control of complete group of lights with dimming.



PRECAUTIONS

- The underwater pool light has to be installed and used in accordance with the instructions of this manual only.
- The power supply has to be disconnected before installation.
- The underwater pool light is recomend to be installed around 0.2 m below the water line for the best illumination and to avoid over-heating.
- The optical window must be clear and not covered by any kind of isolating or other material.
- The optical window has to be cleaned with a mild soap or detergent and lukewarm water by using a soft cloth or sponge. Do not use abrasive or highly alkaline cleaners.
- Never scrape with razor blades or other sharp instruments. Benzene, leaded gasoline, acetone or carbon tetrachloride should never be used.
- Do turn power off immediately and refer servicing to qualified service personnel if the underwater pool light does not operate normally following the operating instructions.

FEATURES

- Innovative Design
- Stainless Steel Ultra-Thin Casing
- 6 High Power warm white LED's
- High Grade Polycarbonate Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation
- Optional accessories for different pools installations

APPEARANCE

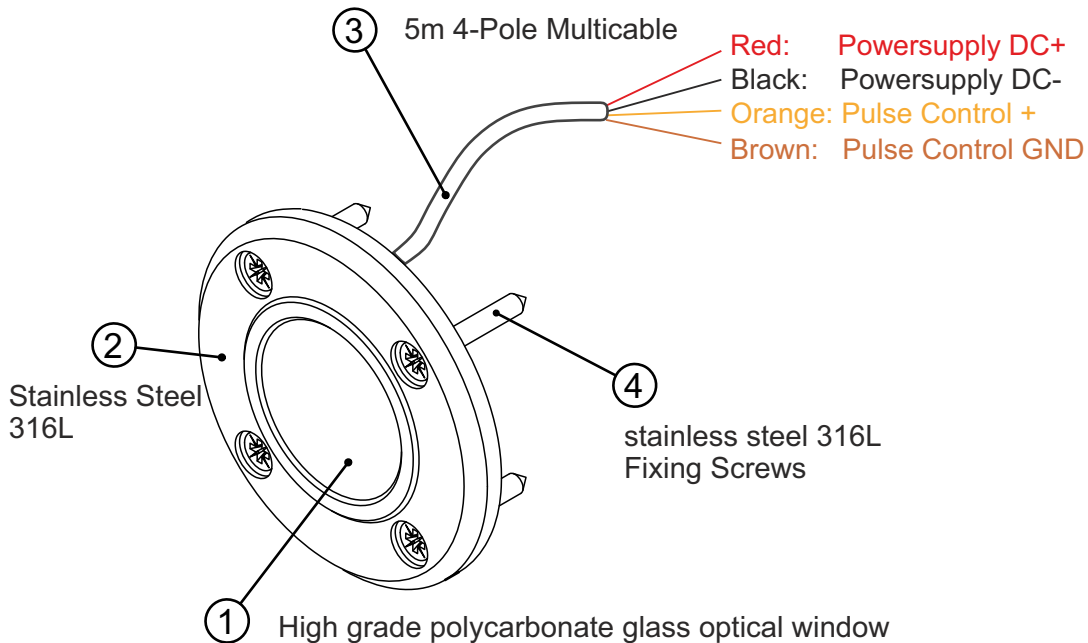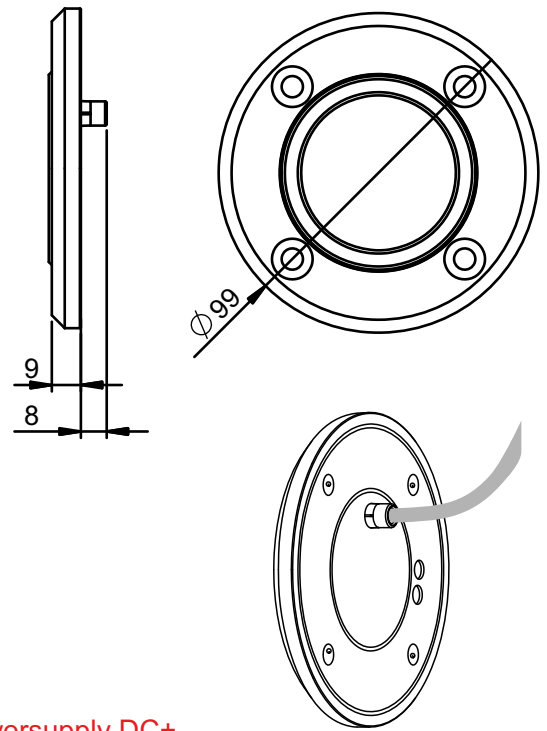

(1) Optical window

High-grade polycarbonate glass optical window.

(2) Underwater pool light casing

Stainless steel casing with fixing holes and cable gland.

(3) Cable

The 4-pole multi-core cable to connect the 12-24Vdc power supply and optional remote control or switch.

(4) Fixing screw

The fixing screws to fix the underwater pool light on the wall.

INSTALLATION

The underwater light kit consists of the following components:


- Underwater Light METEOR 100
- 4 x fixing screw 5.5x38 with wallplugs
- Operating Instructions with Declaration of Conformity and Warranty conditions

The METEOR 100 has to be installed on a flat surface on the pool wall under water line.

Do not try to install the underwater pool light while the pool is filled with water.

When the installation is finished briefly test the underwater light prior to fill the pool with water.

The installation have to be realized by a qualified personnel.

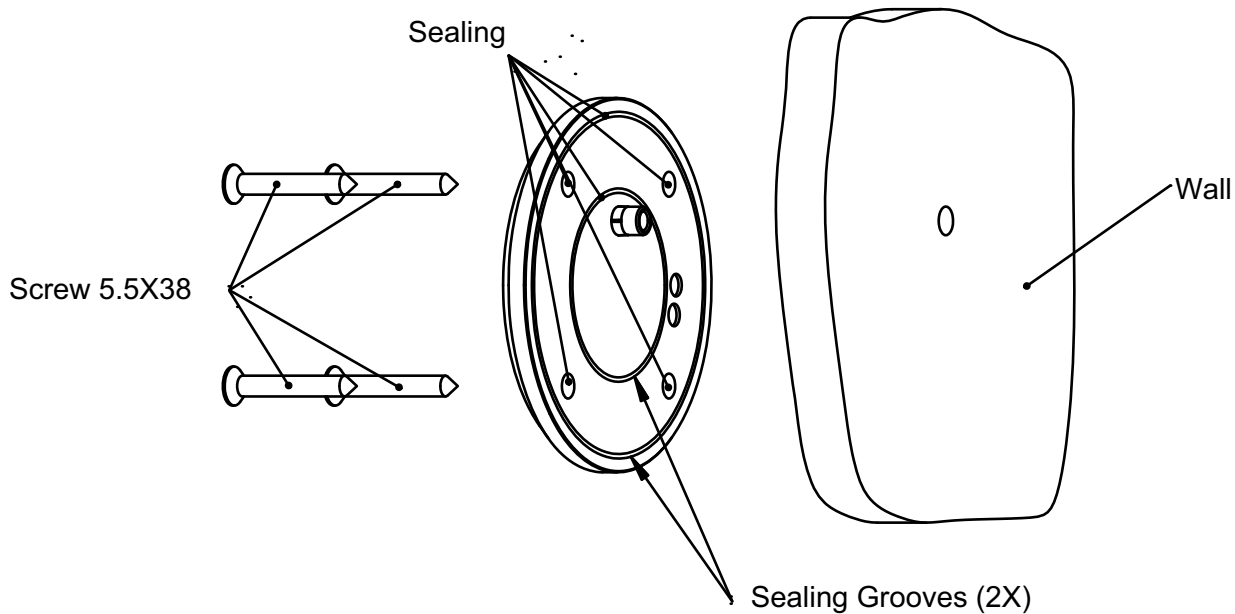

Note:

Avoid using the underwater pool light out of the water for more than 2 minutes.
The underwater pool light is protected by a temperature sensor against over-heating.
When the temperature of the underwater pool light exceeds 85°C the underwater pool light is automatically switched off.

Wall preparation

The underwater pool light is recommended to be installed around 0.2 m below the waterline for the best illumination and to avoid over-heating.

To fix the underwater pool light with screws 5.5x38 the diameter of holes drilled into the wall has to be 8 mm. The diameter of the hole for cable gland drilled through the wall has to be 8 mm.

Sealing

Before inserting the cable with gland through the hole the sealant has to be used into the grooves, around the four fixing holes and around the gland in the rear surface of the underwater pool light.

The sealant can be on silicon basis but the best solution is two-component polymer sealant.

Fixing

The underwater light has to be fixed with four screws 5.5x38 with wallplugs.

Note:

Do not overtighten the screws as this can result in underwater pool light damage.

Earthing

The underwater pool light has to be earthed by using a pre-tinned green wire with a yellow stripe a minimum of 8 AWG (8.36 mm²). The wire has to be connected to the underwater pool light by the help of one fixing screw 5.5x38.

Connection

The power supply has to be connected through the main switch (not included) with correct polarity and protected by a fuse (not included). The power supply voltage has to be from 10 - 30Vdc.

Note:

- The power supply has to be switched off before installation.
- The underwater light has to be connected as described in the table below:

METEOR-100W wire color	FUNCTION
Red	+ DC Power Supply
Black	GND Power Supply
Orange	+ Control
Brown	GND Control

Controls

Remote control can be used to turn-on and turn-off the underwater pool light and to control the luminosity.

Remote control connection

To remotely turn-on and turn-off the underwater pool light the simple switch (not included) can be used and connected to the CONTROL wires by a 2-pole signal cable (not included).

Note:

- ***If the remote control is not used at single-color models for normal operation the both CONTROL wires have to be bridged and insulated or connected to the GND.***

Dimming

The dimming are enabled by using optional PWM dimmer LDU13.

DMX512 control

The network connection to control the lights with the standard DMX512 protocol is enabled by using optional PWM dimmer LDU13 and optional LXU01 or LXU03 interfaces.

Turning on /off

Press the key-switch momentary.

Dimming

When the light is turned-on press the key-switch until the desired illumination is achieved. By another pressing of the key-switch the luminosity will increase to the maximum illumination.

Set default

Press the key switch for min. 40 seconds or until the light is turned off.

TECHNICAL SPECIFICATIONS


Power supply:	12 – 24 Vdc, max. 680 mA/12 Vdc max. 380 mA/24 Vdc
Advised Powersupply @12Vdc:	PLN-30 (A9900350)
Advised Powersupply @24Vdc:	PLN-30 (A9900360)
Lens angle:	60°
Optical window:	High-grade polycarbonate glass
Luminous flux:	650 Lm
White color temperature:	3.000K
Operating temperature:	-10°C - +50°C
Casing:	Stainless steel (316L)
Protection:	IP68
Dimensions:	Ø99 x 9 mm
Weight:	0.4 kg

Highlite international BV
Vestastraat 2
NL 6468 EX Kerkrade
The Netherlands
ARTECTA Division
Phone: +31-(0)45-5667734
Fax: +31-(0)45-5667709
E-Mail: artecta@highlite.nl

Design and specifications subject to change without notice.


One color lights

1

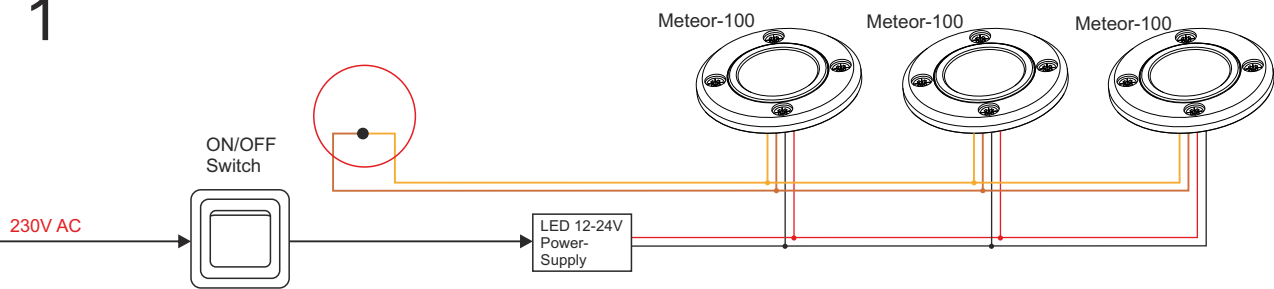

Note: If the remote control is not used for dimming operation the both CONTROL wires have to be bridged and insulated or connected to the GND.

2

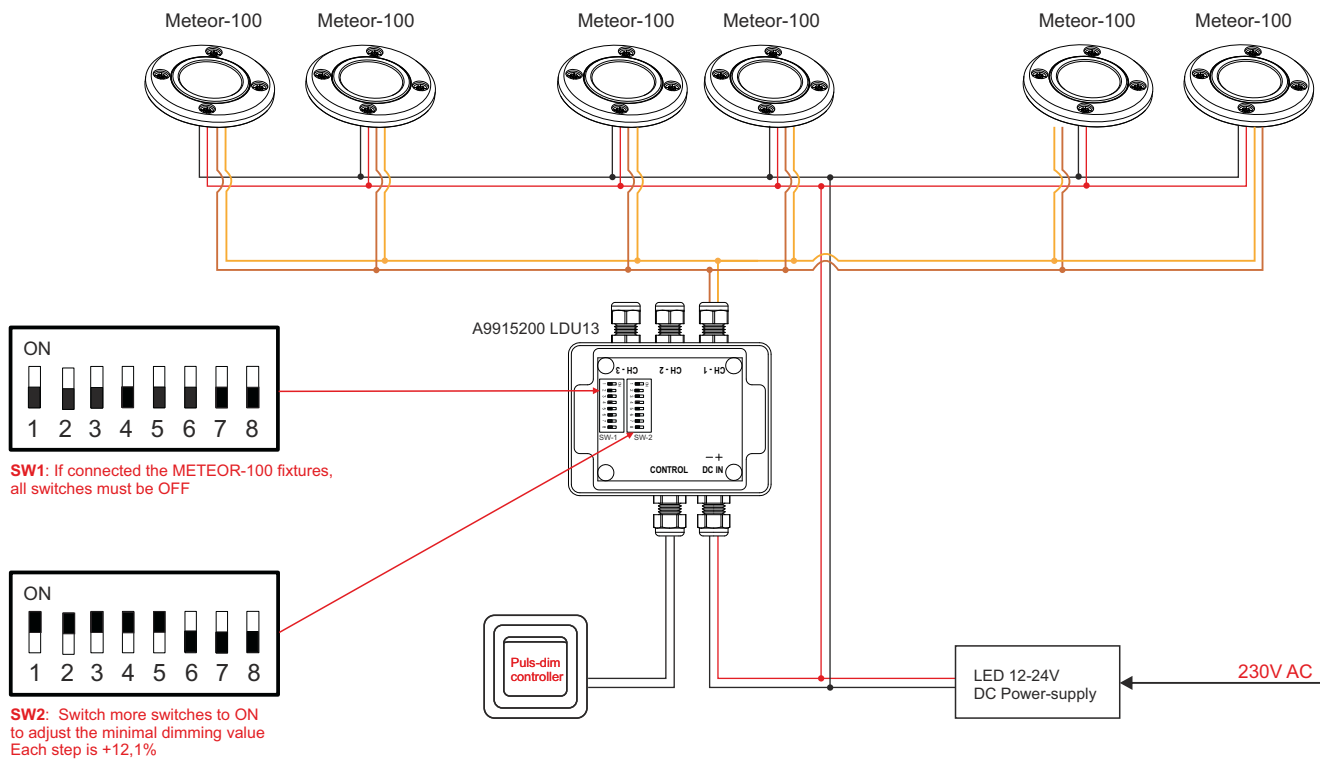

For dimming Meteor series of underwater LED lights, use the LDU PWM Dimmer. The 3 control outputs enable the dimming of 3 groups of underwater LED lights by using of one push-button switch.

Turning ON /OFF:


Press the key-switch momentary.

Dimming:

When the light is turned-on, press the key-switch until the desired illumination is achieved. By another pressing of the key-switch the luminosity will increase to the maximum illumination.

One color lights

3

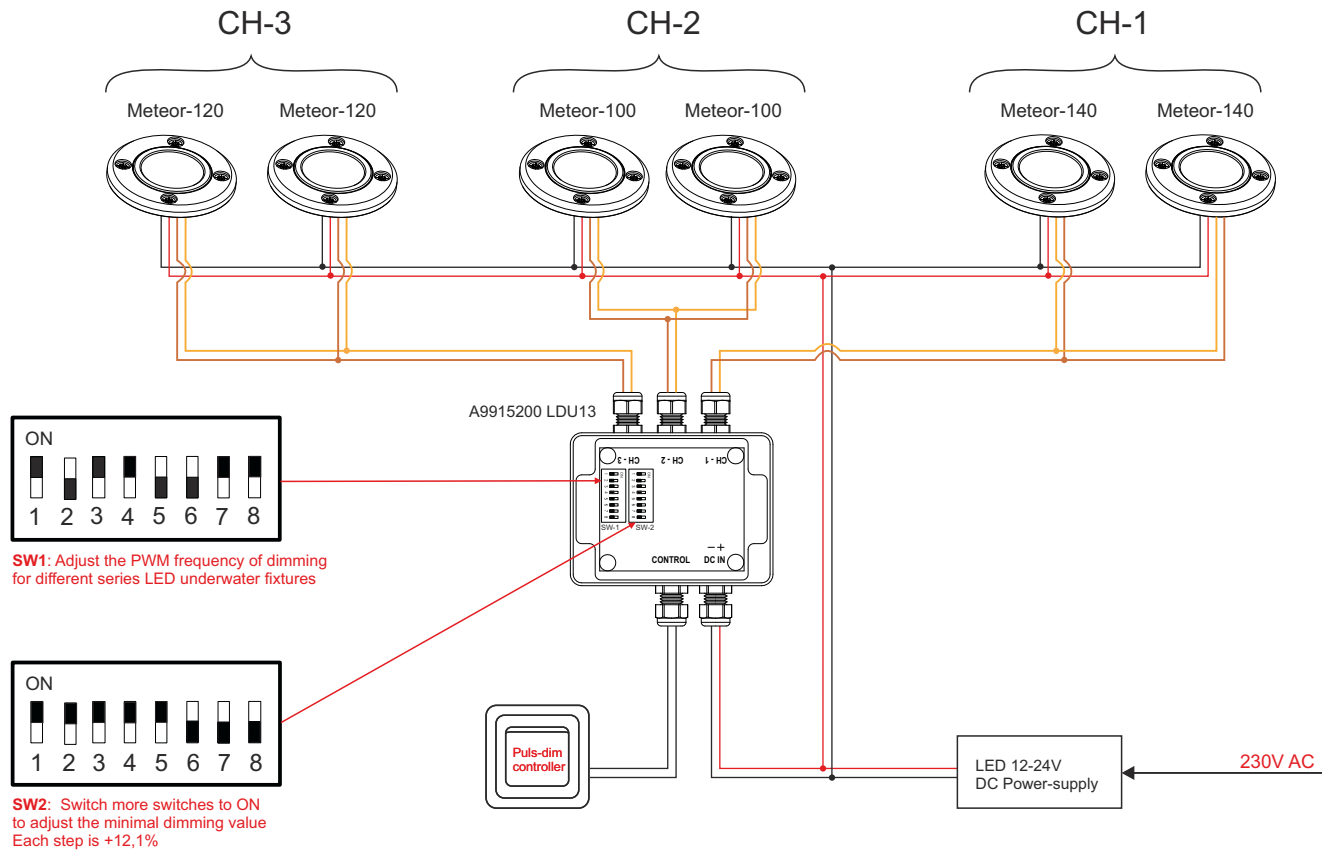

For dimming Meteor series of underwater LED lights, use the LDU PWM Dimmer. The 3 control outputs enable the dimming of 3 groups of underwater LED lights by using of one push-button switch. It is possible to control 3 different groups of underwater lights (for example: Meteor-100 & Meteor-120 & Meteor-140)

Turning ON /OFF:
Press the key-switch momentary.

Dimming:
When the light is turned-on, press the key-switch until the desired illumination is achieved. By another pressing of the key-switch the luminosity will increase to the maximum illumination.



DECLARATION OF CONFORMATY

Supplier Details

Name

Highlite International BV

Address

Vestastraat 2
6468EX Kerkrade
The Netherlands

Product Details

Product Name

Meteor-100 W

Ordercode

A0620110

Trade Name

Arctecta

Applicable Standards Details

1. EMC Directives : 2004/108/EC

EN 55015: 2006+A1: 2007
EN 61547: 1995+A1: 2000+A2: 2009
EN 61547: 2009

2. Low Voltage Directives : 2006/95/EC

EN 60598-1: 2004+A1: 2006

Supplementary information

The conformity to above standards is verified by Astel d.o.o..

Declaration

I hereby declare under our sole responsibility
that the product mentioned above to which this
declaration relates complies with the above mentioned
standards and Directives

Name

S. ildiz

Issued Date

April 22, 2011

Highlite International BV.
Vestastraat 2, 6468 EX Kerkrade,
The Netherlands

Signature of representative

WARRANTY

1. The equipment is warranted by ARTECTA to be free from defects in workmanship and materials under normal use and service.
2. This Warranty is in effect for of two years from the date of purchase by the user. Proof of purchase must be included, to establish that it is inside the warranty period.
3. This Warranty is transferrable and covers the product for the specified time period.
4. In case any part of the equipment proves to be defective, other than those parts excluded in paragraph 5 below, the owner should do the following:
 - (a) prepare a detailed written statement of the nature and circumstances of the defect, to the best of the Owner's knowledge, including the date of purchase, the place of purchase, the name and address of the installer, and the Purchaser's name, address and telephone number;
 - (b) the Owner should return the defective part or unit along with the statement referenced in the preceding paragraph to the warrantor, ARTECTA., or an authorized ARTECTA distributor, postage/shipping prepaid and at the expense of the Purchaser;
 - (c) if upon the Warrantor's or authorized distributor's examination, the defect is determined to result from defective material or workmanship, the equipment will be repaired or replaced at the Warrantor's option without charge, and returned to the Purchaser at the Warrantor's expense;
 - (d) no refund of the purchase price will be granted to the Purchaser, unless the Warrantor is unable to remedy the defect after having a reasonable number of opportunities to do so. Prior to refund of the purchase price, Purchaser must submit a statement in writing from a professional boating equipment supplier that the installation instructions of the Operating Instructions manual have been complied with and that the defect remains;
 - (e) warranty service shall be performed only by the Warrantor, or an authorized distributor, and any attempt to remedy the defect by anyone else shall render this warranty void.
5. There shall be no warranty for defects or damages caused by faulty installation or hook-up, abuse or misuse of the equipment including exposure to excessive heat, salt or fresh water spray, or water immersion except for equipment specially designed as waterproof.
6. There shall be no responsibility or liability whatsoever on the part of the Warrantor or its employees and representatives for injury to any person or persons, or damage to property, loss of income or profit, or any other consequential or resulting damage or cost which may be claimed to have been incurred through the use or sale of the equipment, including any possible failure or malfunction of the equipment, or part thereof.
7. The Warrantor assumes no liability for incidental or consequential damages of any kind including damages arising from collision with other vessels or objects.